
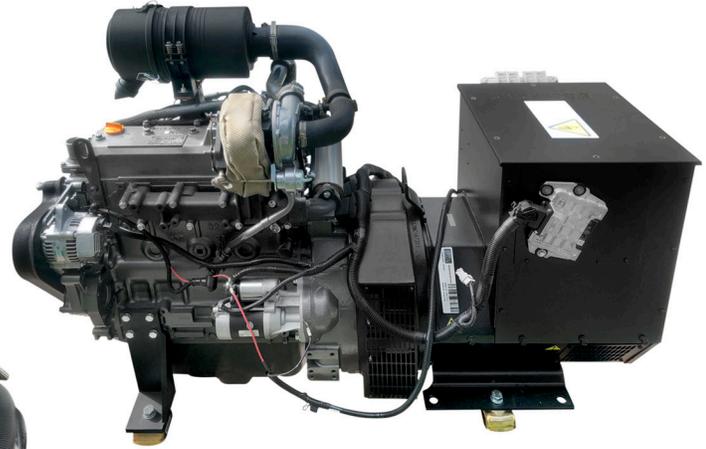


# YK4-45.0KW

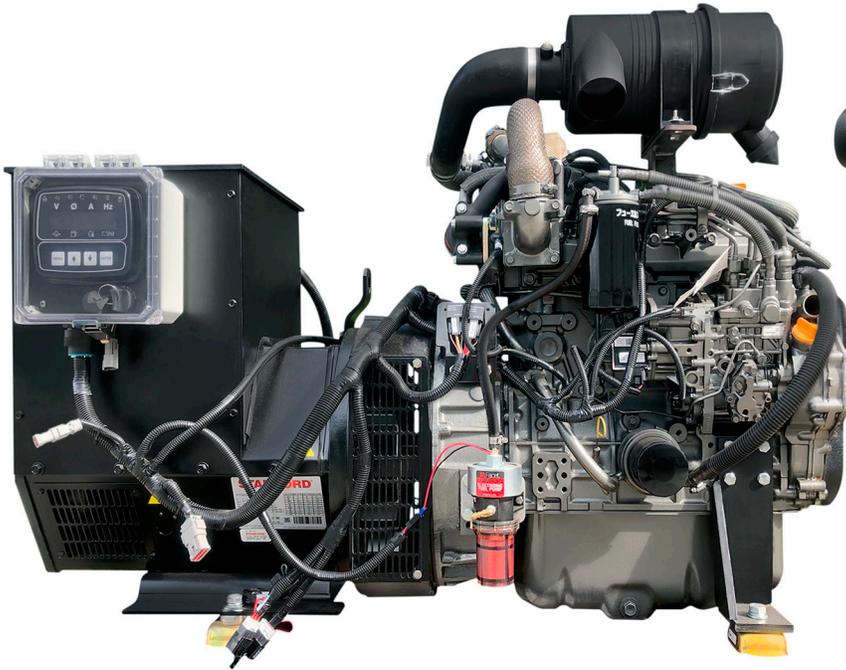

## Specifications

Yanmar Model	4TNV98T-ZGGM
Cylinders	4
Cu. In. Displacement	202.5
Bore x Stroke	98 x 110 (in.)
HP@1,800 RPM	67
Emission Regulations	Tier 3
Cooling System	Keel Cooled / Dry Exhaust
Dimensions (LxWxH)	57 x 30 x 44.5 (in.)
Weight (lbs.)	1422
Starting System	12-Volt DC
Fuel Line Dia.	5/16 in.
Return Line Dia.	5/16 in.
Generator	Stamford / Newage
Frequency	60 Hertz
Output (volts)	208V
Output (amps)	125
Output (watts)	45,000

*Specifications are subject to change without notice*

rev020421

## Standard Features

- 12 DC Start / Charging
- Automatic low oil pressure and high coolant temperature shutdown
- Electric fuel pump
- Fuel filter
- Heavy duty steel mounting frame
- 4-point isolation motor mounts
- Air intake cleaner / silencer
- Brushless excitor
- G-3000 controls including AC-DC digital display
- Oil drain valve

## Optional Equipment

- Remote Start/Stop AC-DC control panel with extension harness
- 24-Volt Starting
- Main line circuit breaker
- Single phase electrical end
- Radiator mounted

**SOUTHEASTERN**  
**POWER PRODUCTS**

2880 Hammondville Road • Pompano Beach, FL 33069 • Ph: 954-979-5899 • Fax: 954-979-4349  
info@southeasternpower.com • www.southeasternpower.com