


# JD4-65.0KW

## Standard Features

- Single bearing brushless generator
- +/- 1% Solid-state voltage regulation
- Low 1,800 RPM operating speed
- Automatic engine shutdown for low oil and high coolant temperature
- Freshwater heat exchange cooling
- Zinc anode in heat exchanger
- Water-cooled manifold and Stainless Steel exhaust elbow
- Direct drive seawater pump
- Primary fuel filter
- Secondary fuel filter
- Air intake Cleaner / Silencer
- 12 Volt DC start / Battery charging alternator
- 4-Point isolation motor
- Awl-Craft 2000 urethane finish
- 5-Year Limited Warranty

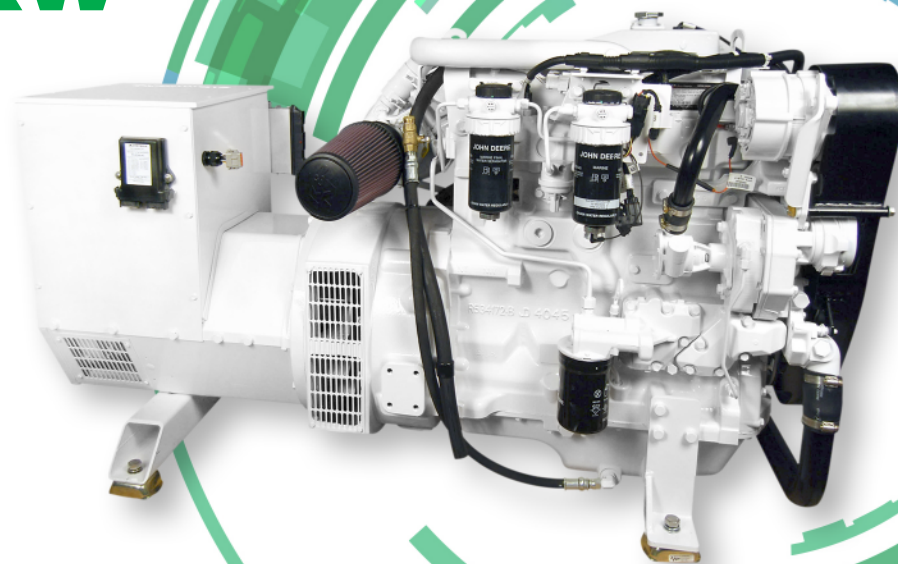

## Specifications

Model	JD4-65.0
Engine	John Deere 4045TFM
Cu. In. Displacement	276
Bore x Stroke	4.19 x 5.00 (in.)
Dims (LxWxH)	65 x 32 x 38 (in.)
Enclosure Dims (LxWxH)	68 x 38 x 41 (in.)
Weight (lbs.)	2375
Output (volts)	120/240 Single phase
Output (amps)	542/271
Output (watts)	65,000
Fuel Consum. @ 50% load	2.6 GPH
Fuel Consum. @ 100% load	4.8 GPH
Exhaust Dia.	3.5 in.

*Specifications are subject to change without notice*

## Optional Equipment

- J-can electronic control panel with display for all engine and generator functions
- Three phase output
- 24 Volt DC start / battery charging alternator
- Dedicated motor starting generator windings
- Stainless Steel drip pan
- Powder coated aluminum enclosure
- Remote oil filter kit
- 50 cycle output
- Custom chrome packages
- Bow thruster FPTO
- Spare parts kit



2880 Hammondville Road • Pompano Beach, FL 33069  
Ph: 954-979-5899 • Fax: 954-979-4349  
info@phasormarine.com • www.phasormarine.com

rev020316