


# JD4-83.0KW

## (50 Hertz)

### Standard Features

- Single bearing brushless generator
- Low 1,500 RPM operating speed
- Safety shutdown system
- 4-Point isolation mounts
- Automatic low oil pressure and high water temperature shutdown
- Freshwater heat exchange cooling
- Zinc anode in heat exchanger
- Water-cooled manifold and Stainless Steel exhaust elbow
- Direct drive seawater pump
- Air intake Cleaner / Silencer
- 12-Volt starting
- 12-Volt battery charging alternator
- Awl-Craft 2000 urethane finish
- 5-Year Limited Warranty

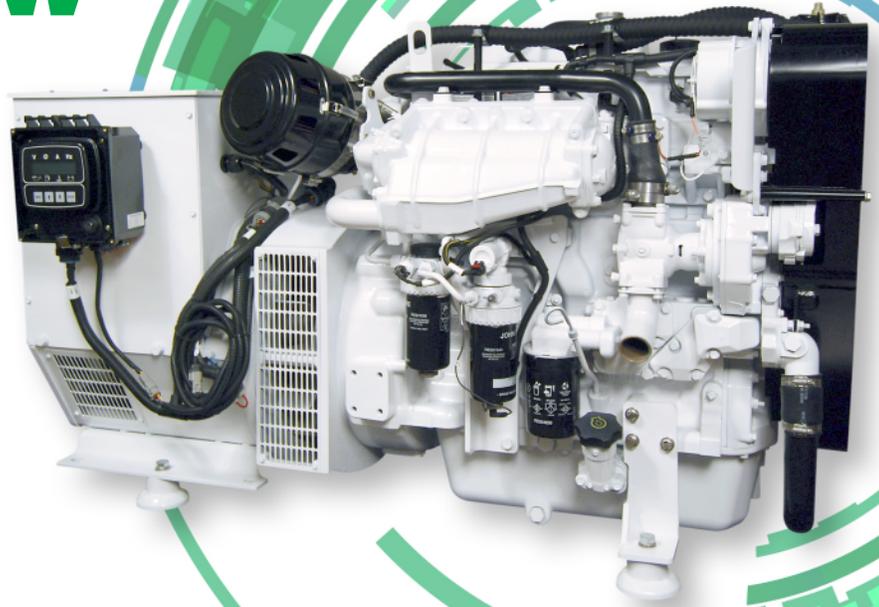

### Specifications

Model	JD-83.0KW
Engine	John Deere 4045AFM85
Cylinders	4
Cu. In. Displacement	273
Bore x Stroke	4.21 x 5.00 (in.)
Dims (LxWxH)	65 x 32 x 38 (in.)
Enclosure Dims (LxWxH)	68.5 x 38 x 41 (in.)
Weight (lbs.)	2584
Output (volts)	208 Three phase
Output (amps)	276
Output (watts)	83,000
Fuel Consum. @ 50% load	4.3 GPH
Fuel Consum. @ 100% load	7.6 GPH
Exhaust Dia.	4.0 in.

*Specifications are subject to change without notice*

### Optional Equipment

- Remote Controls Including Electronic Control Panel With Display For All Engine And Generator Functions
- Stainless Steel Drip Pan
- 24-Volt DC Start
- Dedicated Motor Starting Generator Windings
- Powder Coated Aluminum Enclosure
- Spare Parts Kit



2880 Hammondville Road • Pompano Beach, FL 33069  
Ph: 954-979-5899 • Fax: 954-979-4349  
info@phasormarine.com • www.phasormarine.com

rev112323