


K3-7.0KW

COMPACT SERIES

(50 Hertz)

Standard Features

- Kubota Diesel Engine
- Single bearing direct coupled generator
- +/- 1% Solid-state voltage regulation
- Low 1,500 RPM operating speed
- Safety shutdown system for high coolant temperature or low lube oil pressure
- Single series circuit control system with no printed circuit boards – tinned wiring
- Main line circuit breaker - single phase
- Freshwater double pass heat exchanger
- Water-cooled exhaust manifold with removable intergral Cupro-Nickel heat exchanger core
- Zinc anode in heat exchanger
- Stainless Steel exhaust elbow cast
- Gear-driven raw water pump
- 4-Point isolation mounts S/S
- Molded blue silicone water hoses with Stainless Steel AWAB clamps
- Air intake Cleaner / Silencer
- Spin-on lube filter
- Secondary 5 Micron fuel filter
- Self-bleed fuel system
- USCG approved fuel lines
- Electric fuel transfer pump
- Forged brass oil drain valve with safety lock
- Awl-Craft 2000 urethane finish
- Belt guard
- 5-Year Limited Warranty

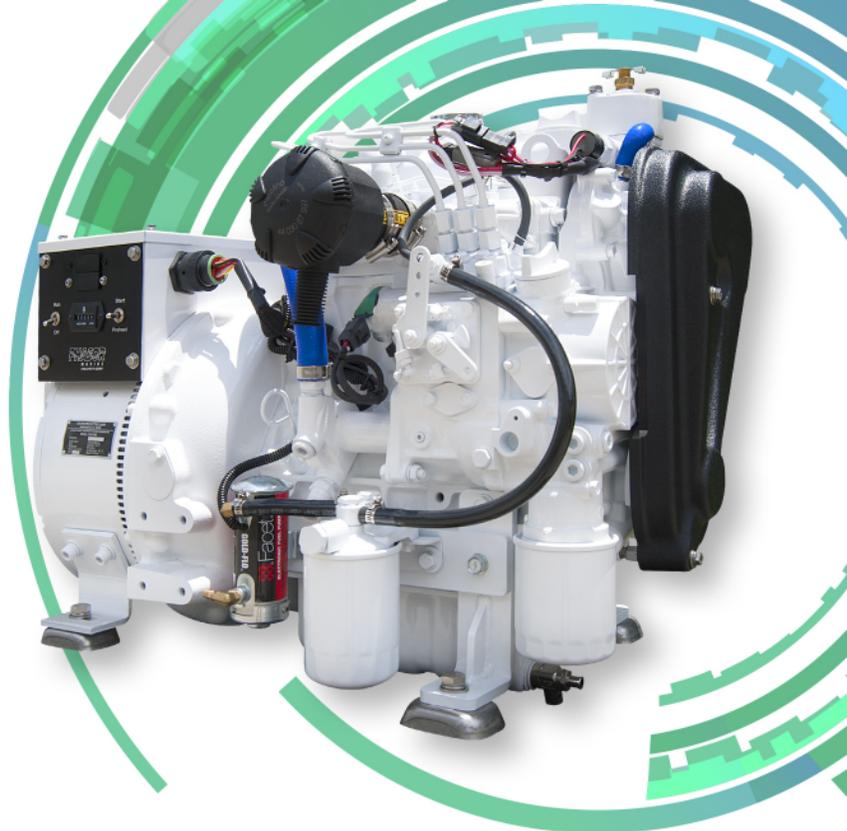

Specifications

Kubota Model	D1105-E4BG
Cylinders	3
Cu. In. Displacement	68.5
Bore x Stroke	3.07 x 3.09 (in.)
Dims (LxWxH)	26.5 x 18 x 22.5 (in.)
Enclosure Dims (LxWxH)	30 x 23 x 25.5 (in.)
Weight (lbs.)	410
Output (volts)	230 (50 Hertz)
Output (amps)	30.43
Output (watts)	7,000
Exhaust Dia.	2 in.
Raw water Dia.	3/4 in.
Fuel Line Dia.	5/16 in.
Return Line Dia.	3/16 in.

Specifications are subject to change without notice

Optional Equipment

- Remote Start / Stop – 20ft. Harness
- DC Gauge Panel – 20ft. Harness
- Stainless Steel Drip Pan
- 24-Volt Starting System
- Powder Coated Aluminum Enclosure
- Sound Insulation Blanket
- Spare Parts Kit



2880 Hammondville Road • Pompano Beach, FL 33069
Ph: 954-979-5899 • Fax: 954-979-4349
info@phasormarine.com • www.phasormarine.com

rev112323